


HB-200

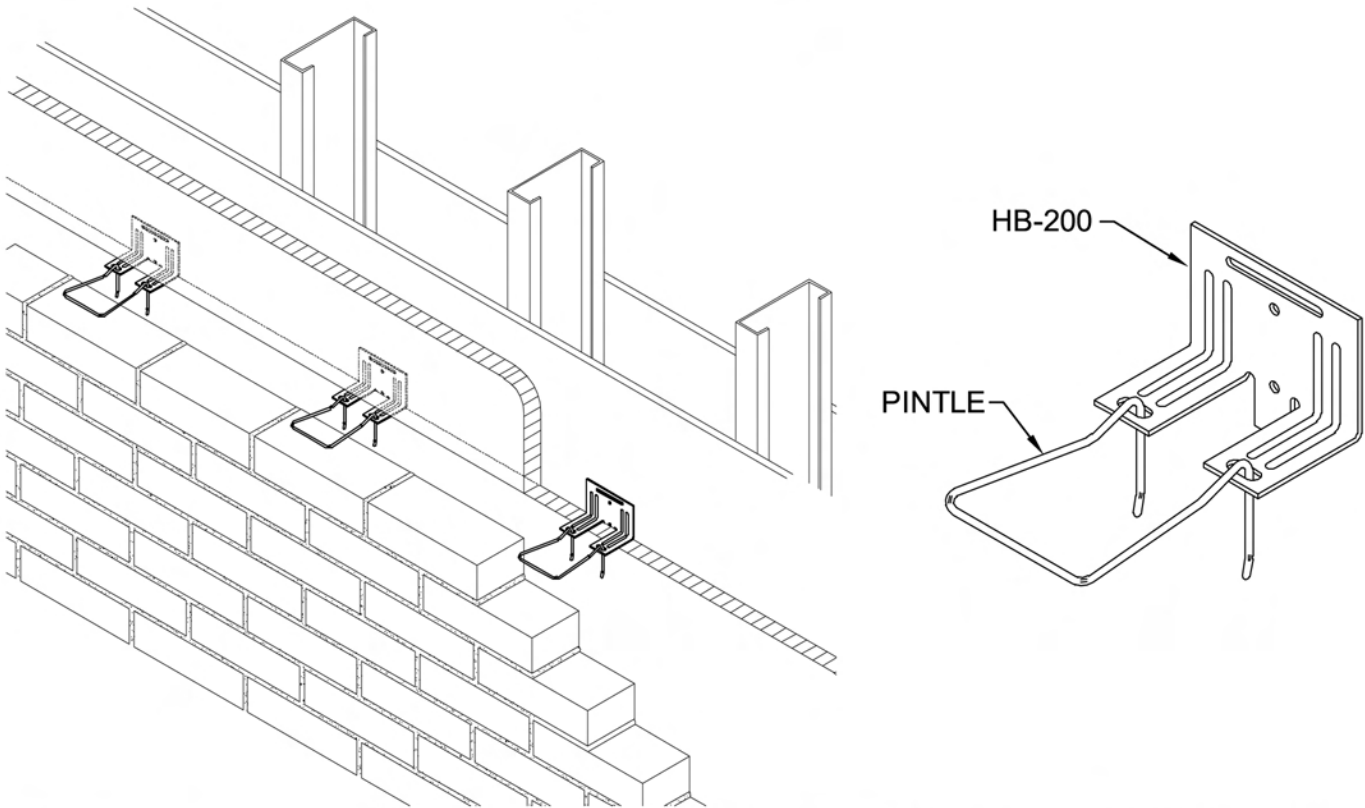

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

WIRE (Carbon Steel):

Cold-drawn steel wire conforming to ASTM A 82:

Tensile strength - 80,000 p.s.i.

Yield Point - 70,000 p.s.i. minimum

Zinc Coating:

Hot-dip galvanized after fabrication: ASTM A 153 (1.5 oz/ff)

Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ff

WIRE (Stainless Steel):

ASTM A 580 - AISI Type 304. (Type 316 available on special order.)

SHEET METAL (Carbon Steel):

ASTM A 366

Zinc Coating:

ASTM A 153 Class B (sheet metal ties and anchors hot-dip galvanized after fabrication).

Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ff

SHEET METAL (Stainless Steel):

ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors) (Type 316 available on special order).

Note: H&B recommends Stainless Steel for maximum protection against corrosion.

HB-200 BACKPLATE

STYLE:

INSULATION THICKNESS:

| | |
|--|--------|
| <input type="checkbox"/> HB-200 (0") | 0" |
| <input type="checkbox"/> HB-200 (1") | 1" |
| <input type="checkbox"/> HB-200 (1 1/2") | 1 1/2" |
| <input type="checkbox"/> HB-200 (2") | 2" |
| <input type="checkbox"/> HB-200 (2 1/2") | 2 1/2" |
| <input type="checkbox"/> HB-200 (3") | 3" |
| <input type="checkbox"/> HB-200 (3 1/2") | 3 1/2" |

THICKNESS:

- 14 Gauge
- 12 Gauge

3/16"Ø PINTLE LENGTH:

- 3"
- 4"
- 4 3/4"
- 5 1/4"
- CUSTOM _____

FINISH:

- Hot Dip Galvanized
- Stainless Steel