


# #Slip-Set Stabilizer

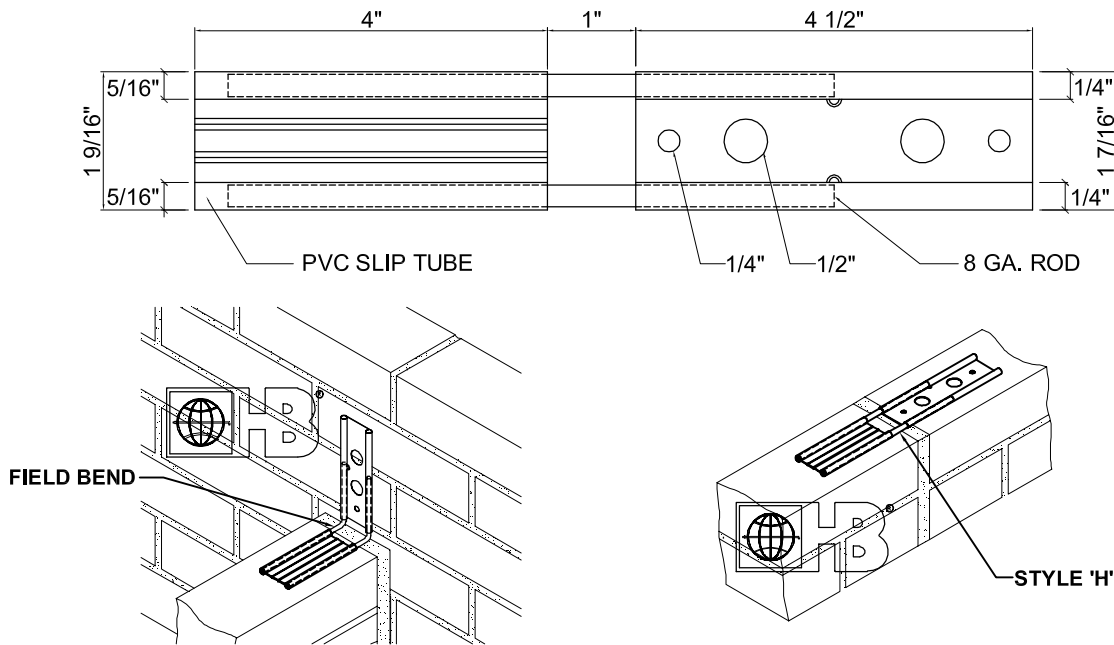

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

<p><b>WIRE (Carbon Steel):</b> Cold-drawn steel wire conforming to ASTM A 82: Tensile strength - 80,000 p.s.i. Yield Point - 70,000 p.s.i. minimum Zinc Coating: Hot-dip galvanized after fabrication: ASTM A 153 (1.5 oz/ft<sup>2</sup>) Note: Hohmann &amp; Barnard will certify to a minimum of 2.0 oz/ft<sup>2</sup></p> <p><b>WIRE (Stainless Steel):</b> ASTM A 580 - AISI Type 304. (Type 316 available on special order.)</p> <p><b>SHEET METAL (Carbon Steel):</b> ASTM A 366 Zinc Coating: ASTM A 153 Class B (sheet metal ties and anchors hot-dip galvanized after fabrication). Note: Hohmann &amp; Barnard will certify to a minimum of 2.0 oz/ft<sup>2</sup></p> <p><b>SHEET METAL (Stainless Steel):</b> ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors) (Type 316 available on special order). Note: H&amp;B recommends Stainless Steel for maximum protection against corrosion.</p> <p><b>PVC SLIP TUBE:</b> Impact-resistant, rigid polyvinyl chloride tested in conformance with: ASTM D 1781 (Cell Classification) ASTM D 2240 (Hardness Shore D) ASTM D 638 (Tensile Yield &amp; Modulus) ASTM D 790 (Flexural Strength &amp; Modulus)</p>	<p><b>FINISH:</b></p> <ul style="list-style-type: none"> <li><input type="checkbox"/> Mill Galvanized</li> <li><input type="checkbox"/> Hot Dip Galvanized</li> <li><input type="checkbox"/> Stainless Steel</li> </ul>
---	---